REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

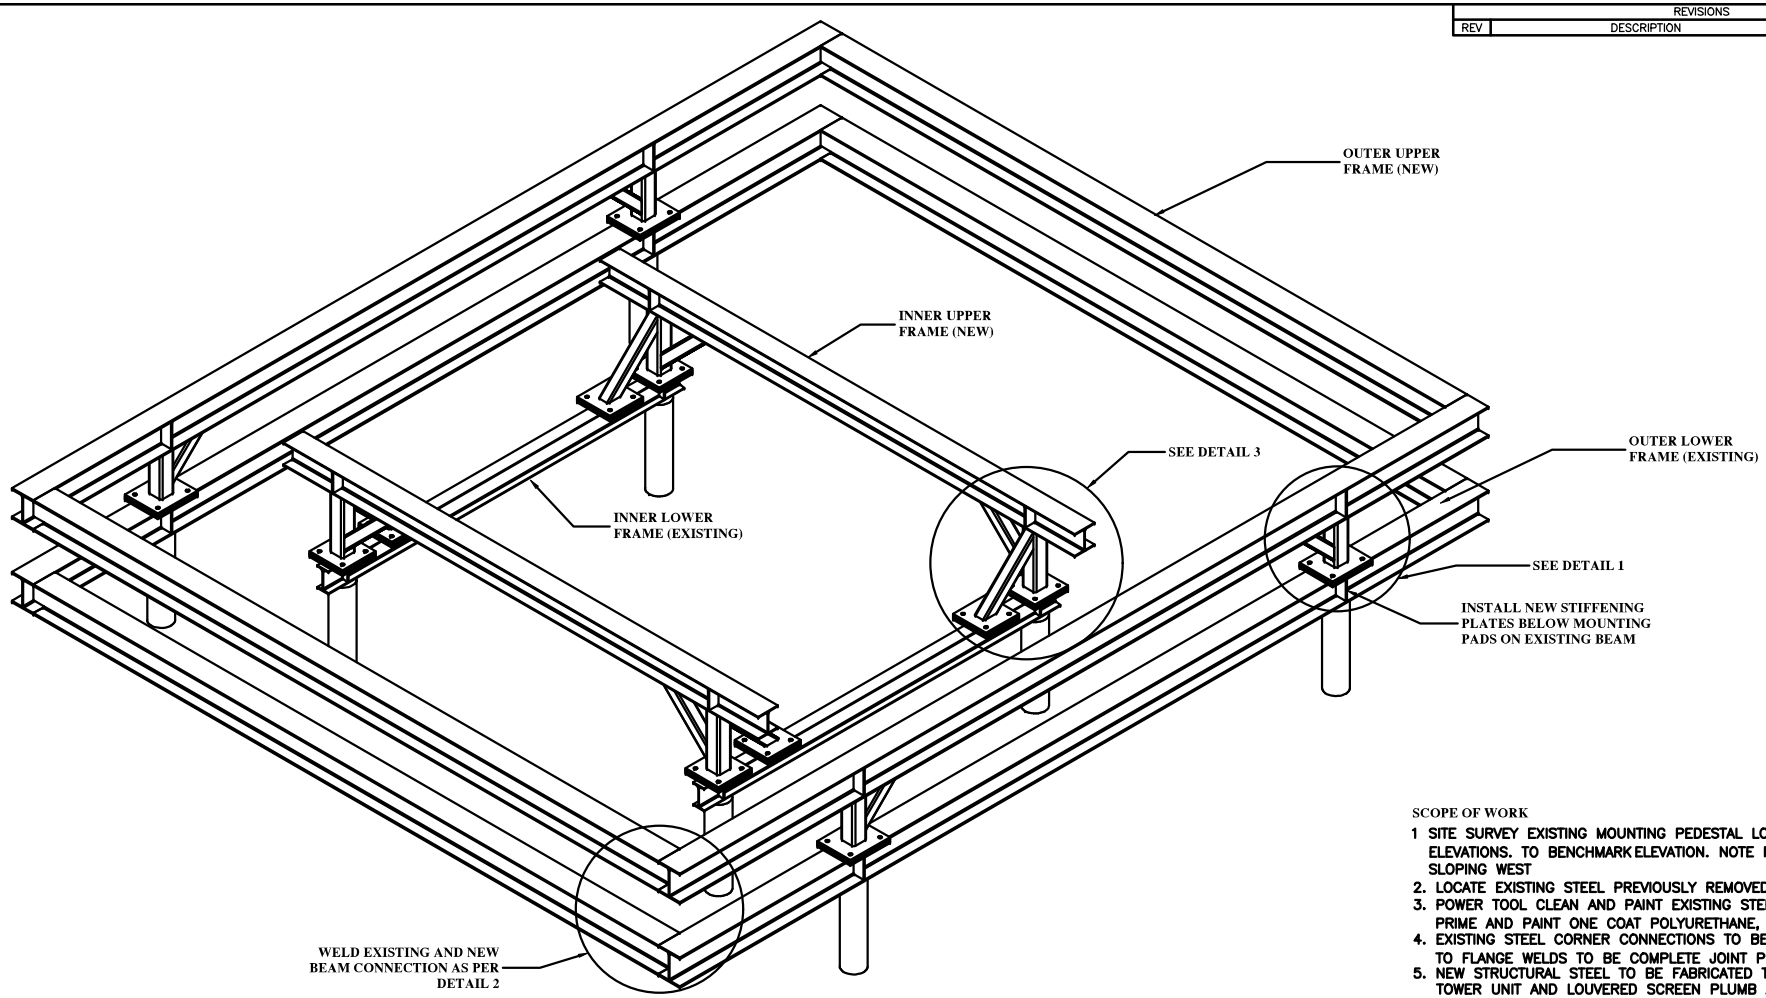

SCOPE OF WORK

1. SITE SURVEY EXISTING MOUNTING PEDESTAL LOCATIONS AND ELEVATIONS. TO BENCHMARK ELEVATION. NOTE ROOF DECK IS SLOPING WEST
2. LOCATE EXISTING STEEL PREVIOUSLY REMOVED AND STORED ON SITE.
3. POWER TOOL CLEAN AND PAINT EXISTING STEEL TO BE REUSED. PRIME AND PAINT ONE COAT POLYURETHANE, 4 MIL THICKNESS.
4. EXISTING STEEL CORNER CONNECTIONS TO BE WELDED. FLANGE . TO FLANGE WELDS TO BE COMPLETE JOINT PENETRATION
5. NEW STRUCTURAL STEEL TO BE FABRICATED TO SUPPORT COOLING TOWER UNIT AND LOUVERED SCREEN PLUMB AND LEVEL
6. SHOP BUILD AND ASSEMBLE STRUCTURAL STEEL ON SITE WITH BOLTED CONNECTIONS
7. INSTALL½" THICKARMATHERM PADS BETWEEN NEW POST BASE PLATES AND EXISTING STEEL.

GENERAL NOTES– COOLING TOWER SUPPORTS
STRUCTURES DESIGNED ACCORDING TO PART 4, NBCC 2020, MANITOBA BUILDING CODE 2024, LIMIT STATES DESIGN.
SITE VERIFY ALL DIMENSIONS
STRUCTURAL STEEL AND METALS

1. STRUCTURAL STEEL BEAMS TO CSA GA0.2j GRADE 350W
2. STEEL PLATES, CHANNELS AND ANGLES TO CSA G40.21 GRADE 300W
3. HSS STRUCTURAL TUBING TO CSA G40.21 GR 350W OR ASTM A500 GR C.
4. WELD QUALITY TO CSA 1"159–24
5. FABRICATOR TO BE CERTIFIED TO CSA W47.1 DNISION 1 OR 2
6. ALL NEW STEEL TO BE POWDER COATED OR PRIME PAINTED THEN FINISH COATED WITH 2 COATS POLYURETHANE MINIMUM 6 MIL THICKNESS. COLOUR TO BE "INDUSTRIAL GREY".
7. HSS TUBES TO BE FILLED WITH POLYURETHANE FOAM.

REV.	SIZE
0	B

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS ANGULAR
.XX ±.010 ±1/2°
.XXX ±.005 FRACTIONS
.XXXX ±.0005 ±1/64

MATERIAL

TREATMENT

FINISH
TBD

ACAD FILE:

Conceptions

DRAWN	R Lawson	DATE 01/24/26
CHECK		
ENG		
PROD		
QC		
MFG		
TOOLING		

BSE WELDING ENGINEERING LIMITED

TITLE:
R.B. RUSSEL SCHOOL
RISER PEDISTALS

DWG. NO.
01242026

SCALE: N/A

SHEET S–1

1/24/2026 1:16 PM d:\conceptions\files\customers\bse\rb russel school\cooling tower.dwg